

WARNING
WARNING
DIESEL



15A
P/N 02-394771
24V DC 15A








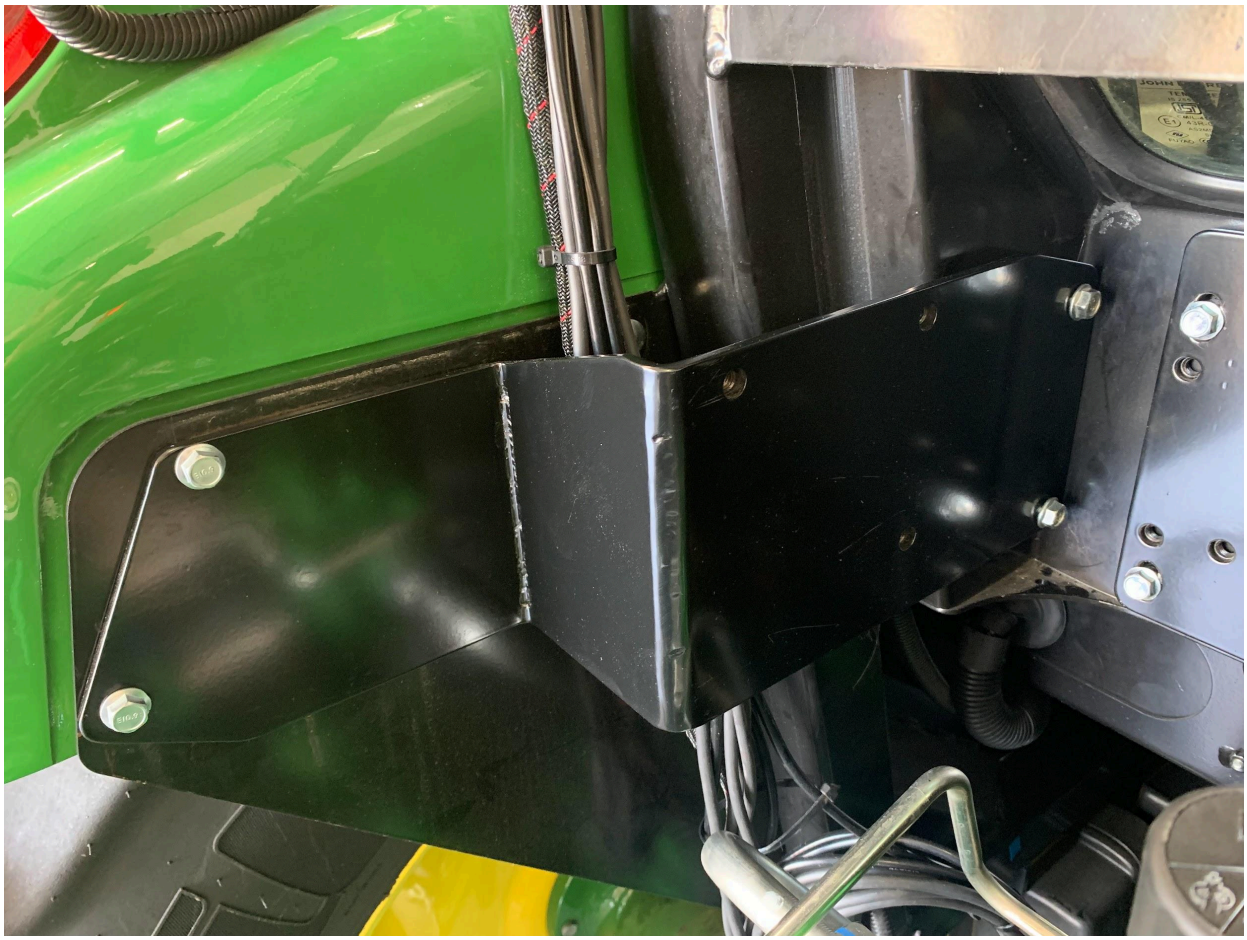

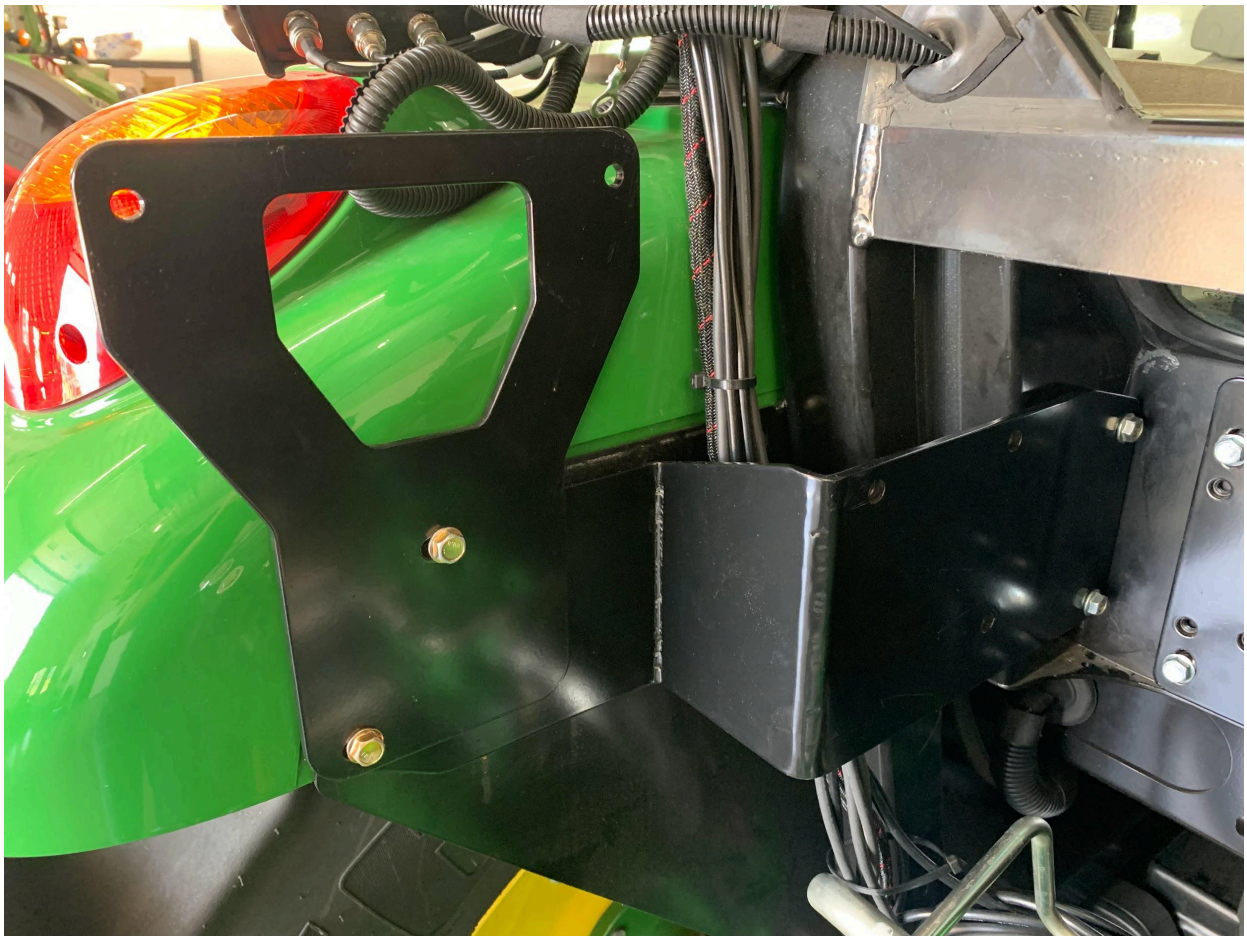


22.5 MPa [3250
8M3K Mega3000TM
POWERING PROGR

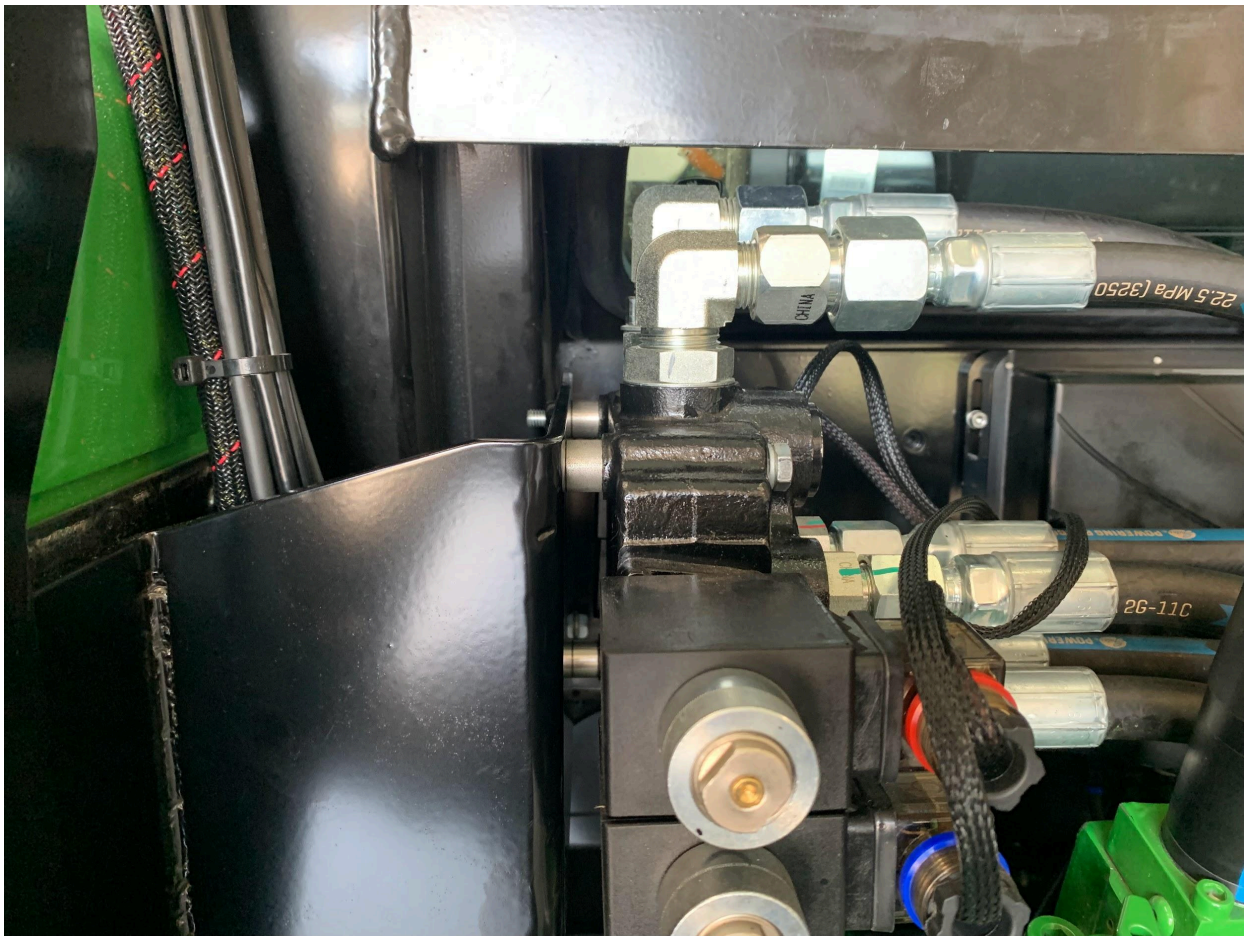

22.5 MPa (3250
CHINA
2G-11C


22.5 MPa (3250 PSI) 1/2" (12.5 mm)
POWERING PROGRESS


JOHN DEERE






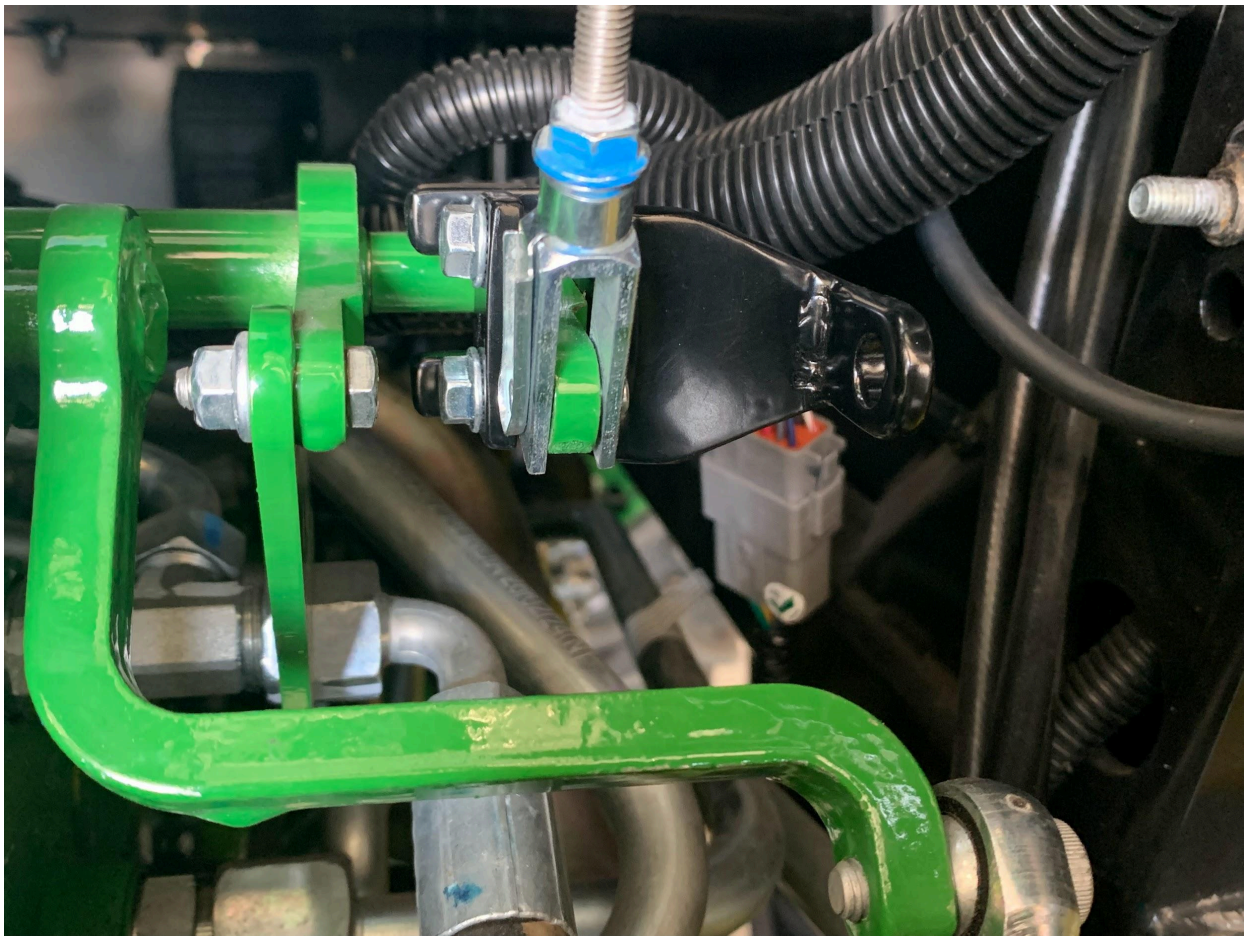







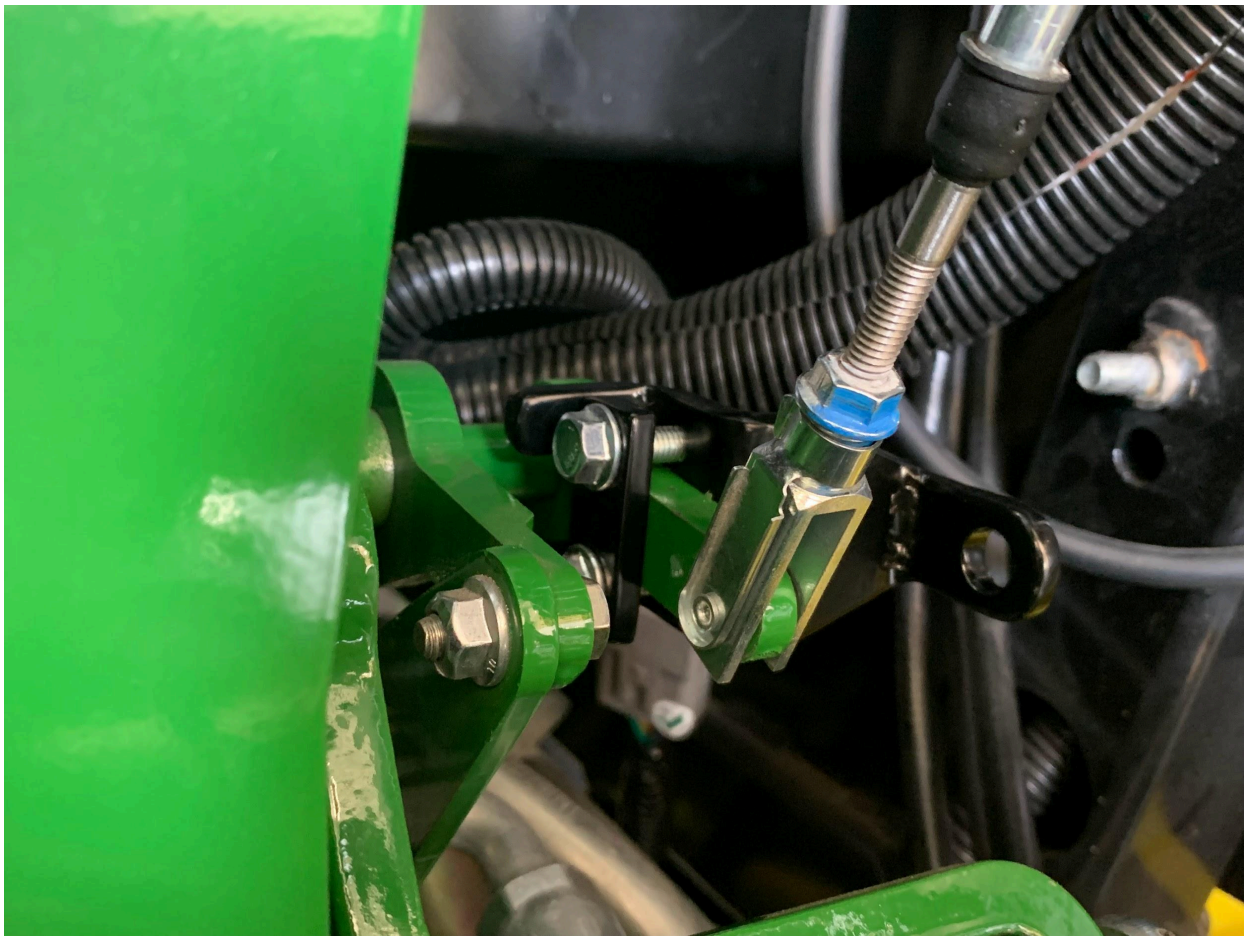




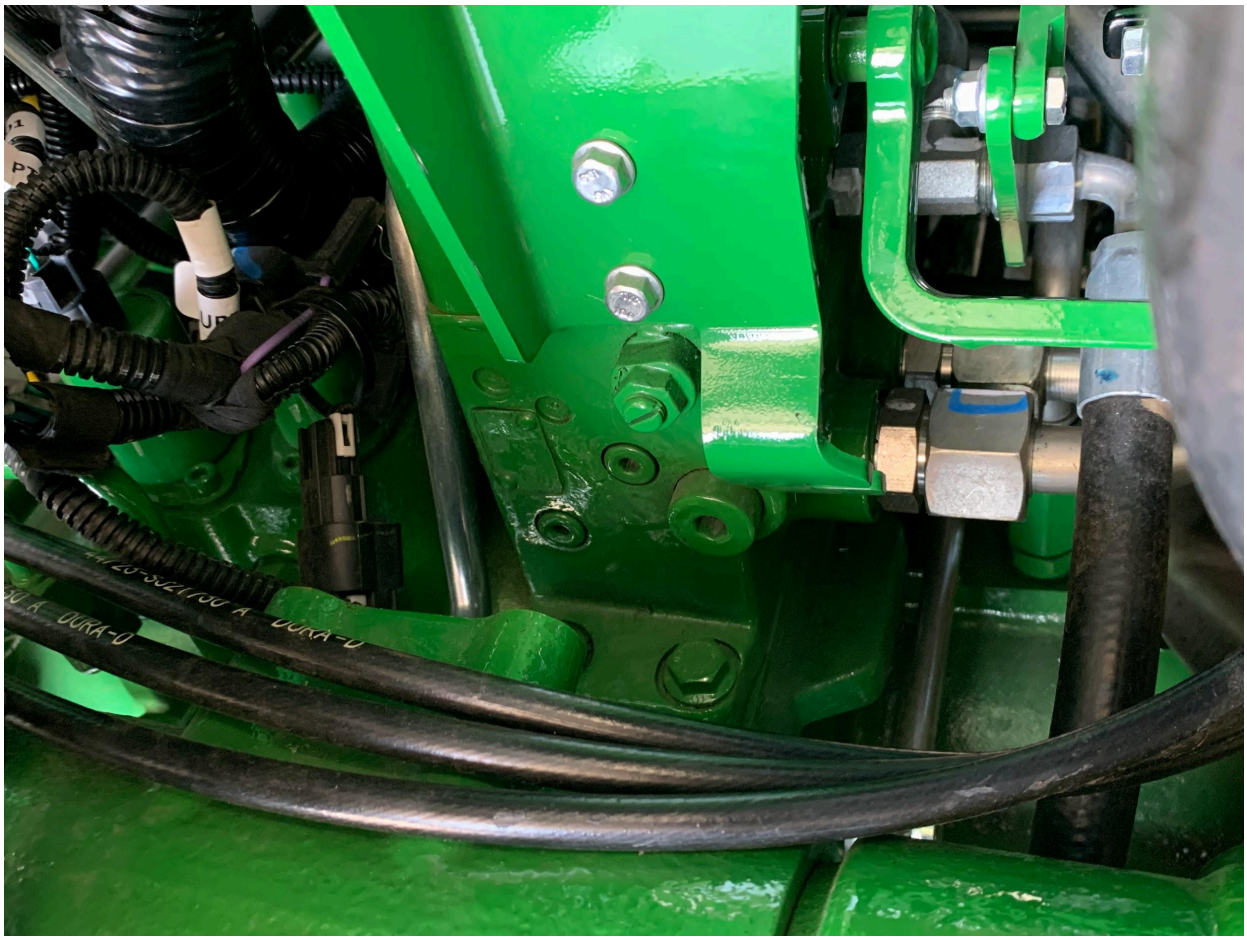


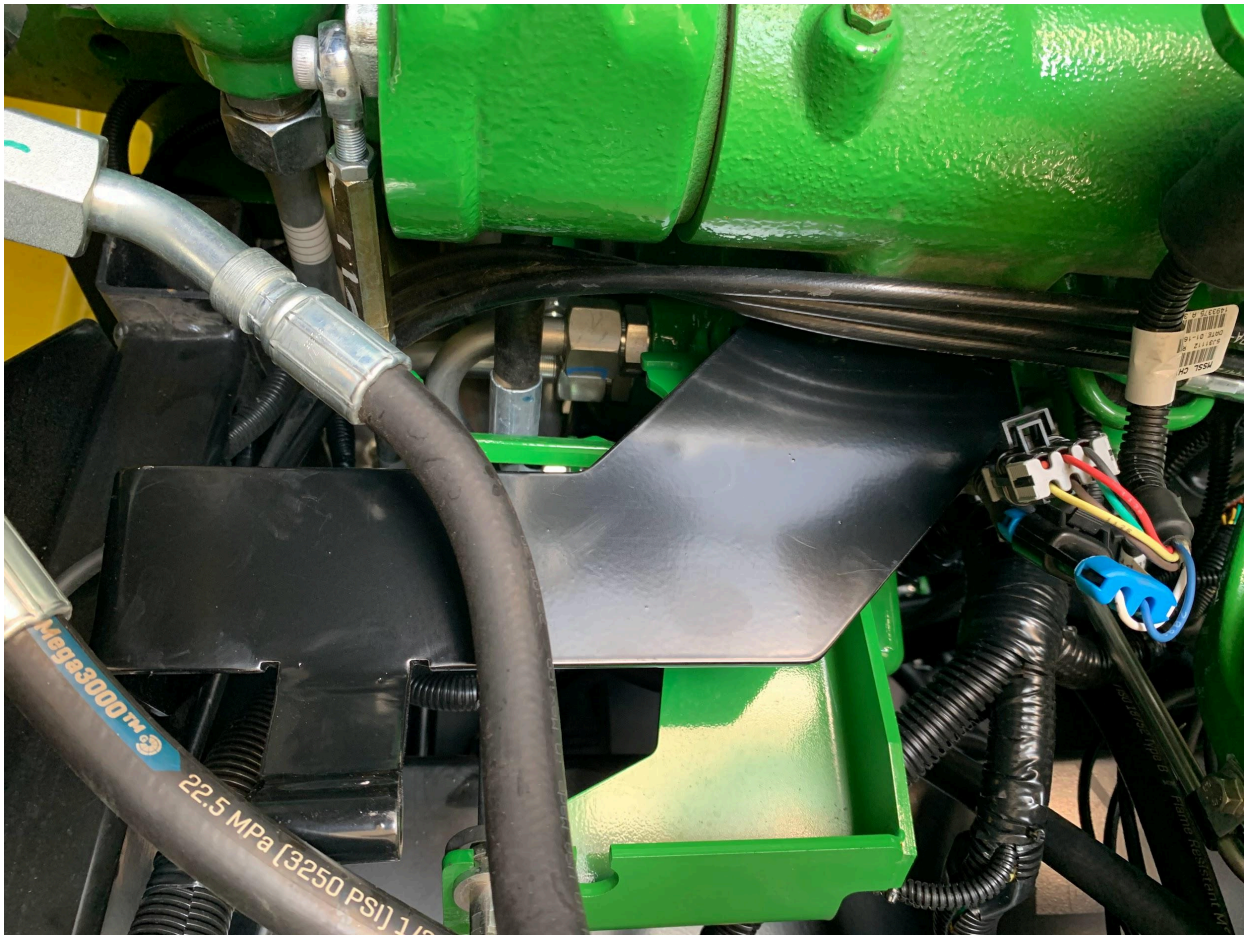




Hegge3000™
22.5 MPa (3250 PSI)

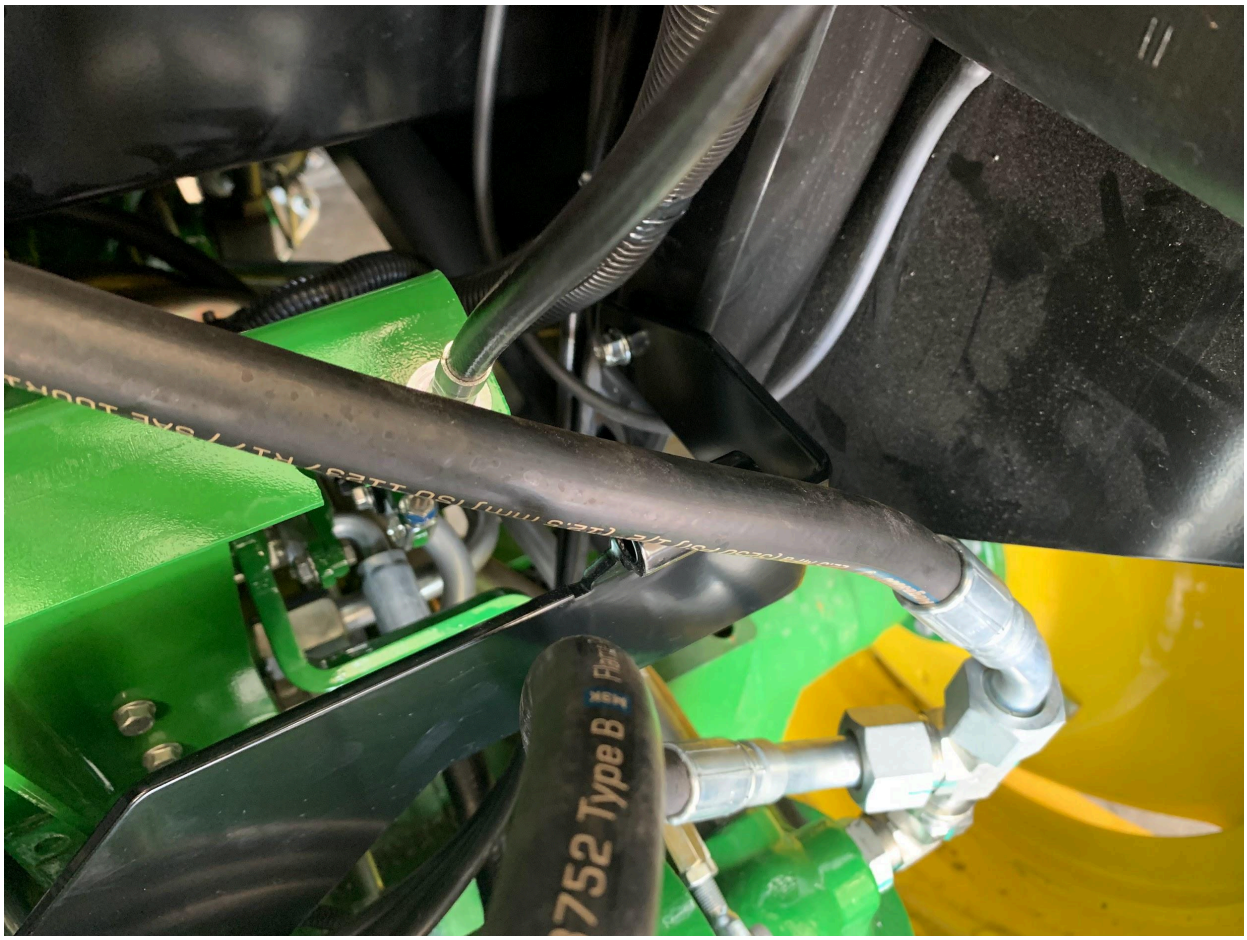
752 Type B


A DURA-D
44/23-SJ2173
44/23-SJ01730 A DURA-

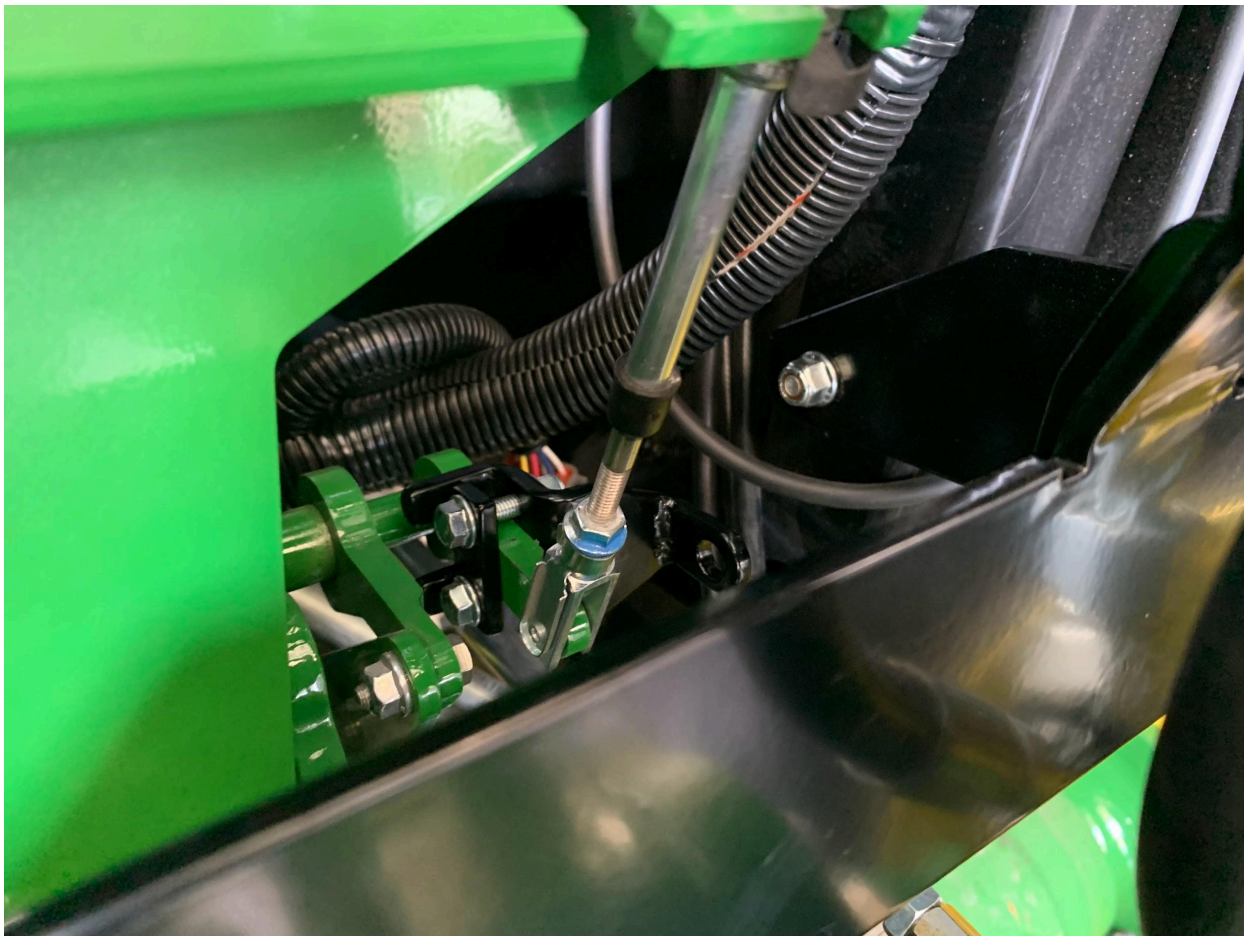

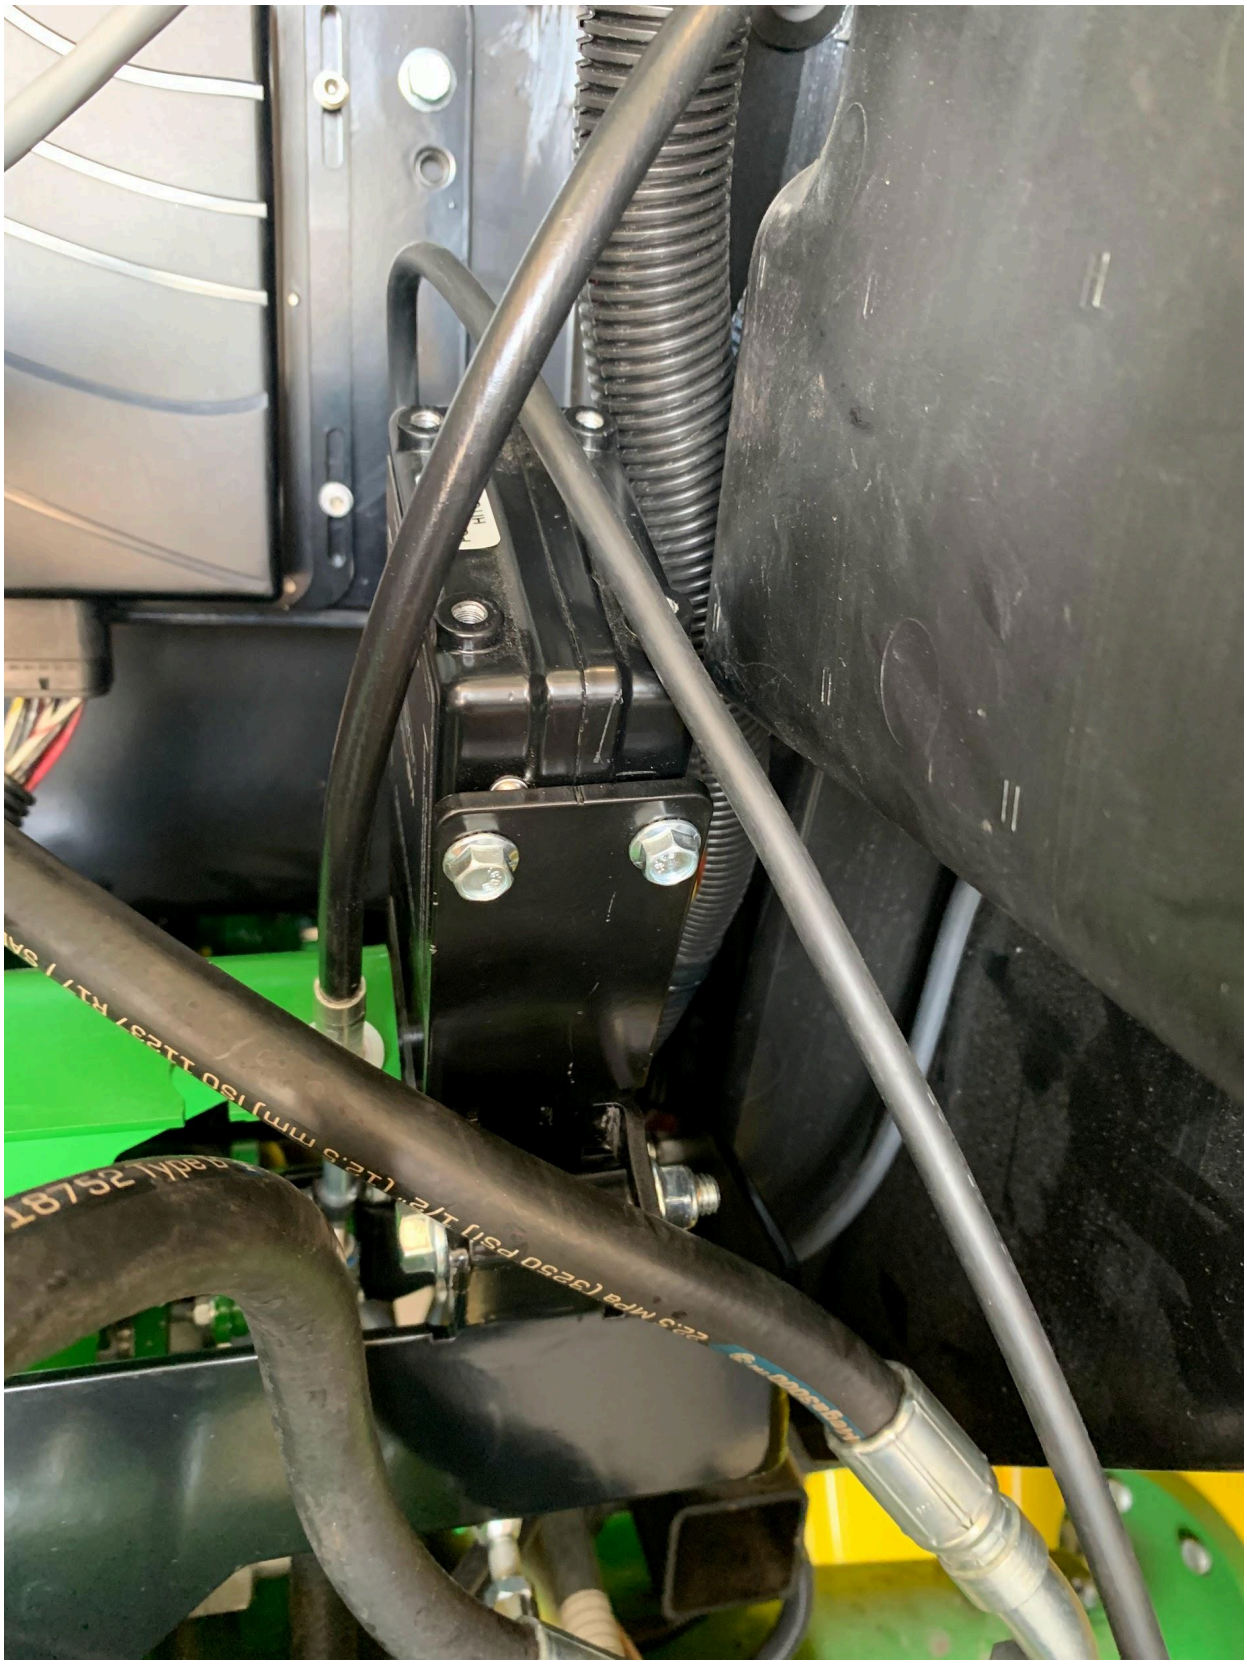

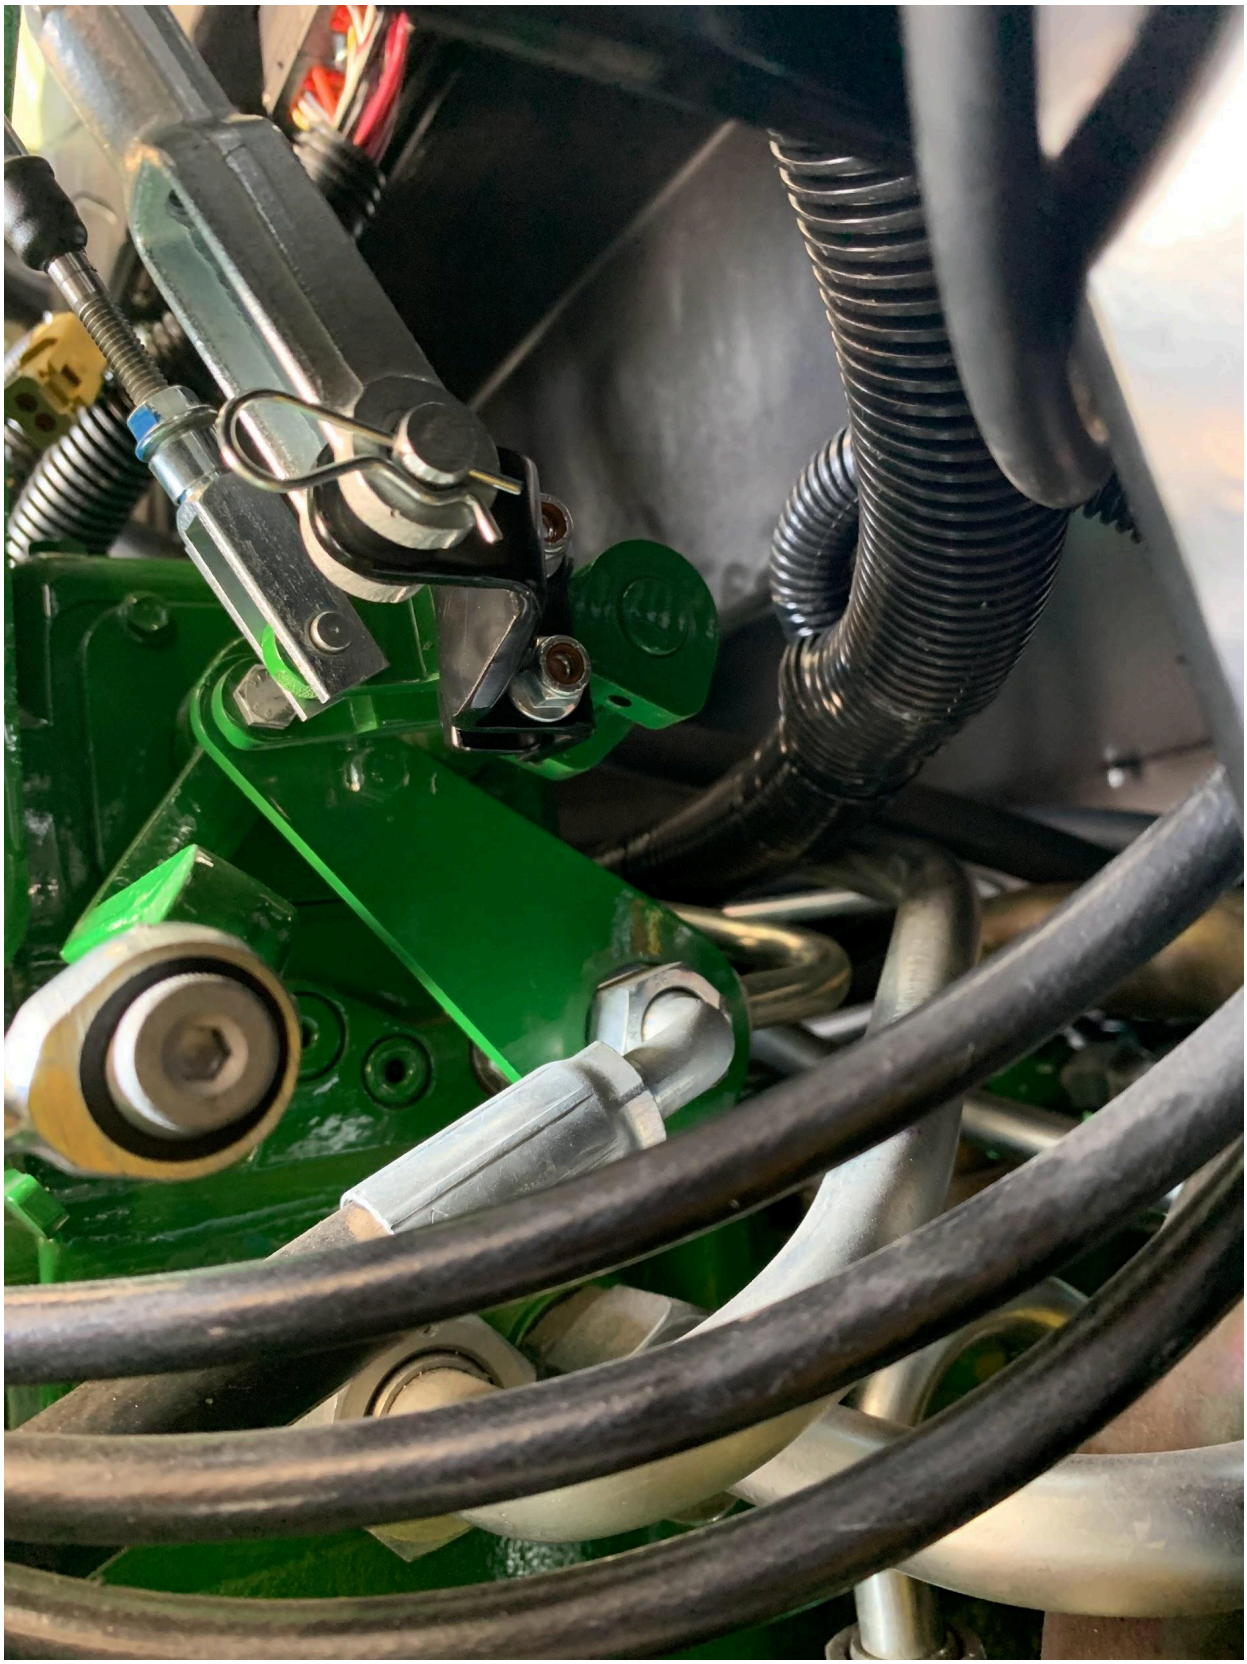



















JOHN DEERE






JOHN DE RE
WARNING
To avoid injury or death caused by falling loads:
• Do not handle round bales unless loader is equipped with approved bale handling attachments.
• Lockout optional valve detents.
• Handle raised loads with caution.
• Carry loads low.
WARNING
To avoid injury from falls:
• Do not work from or allow riders on loader or its attachments.

WARNING
Avoid serious injury or death from electrocution. Do not contact electric lines.

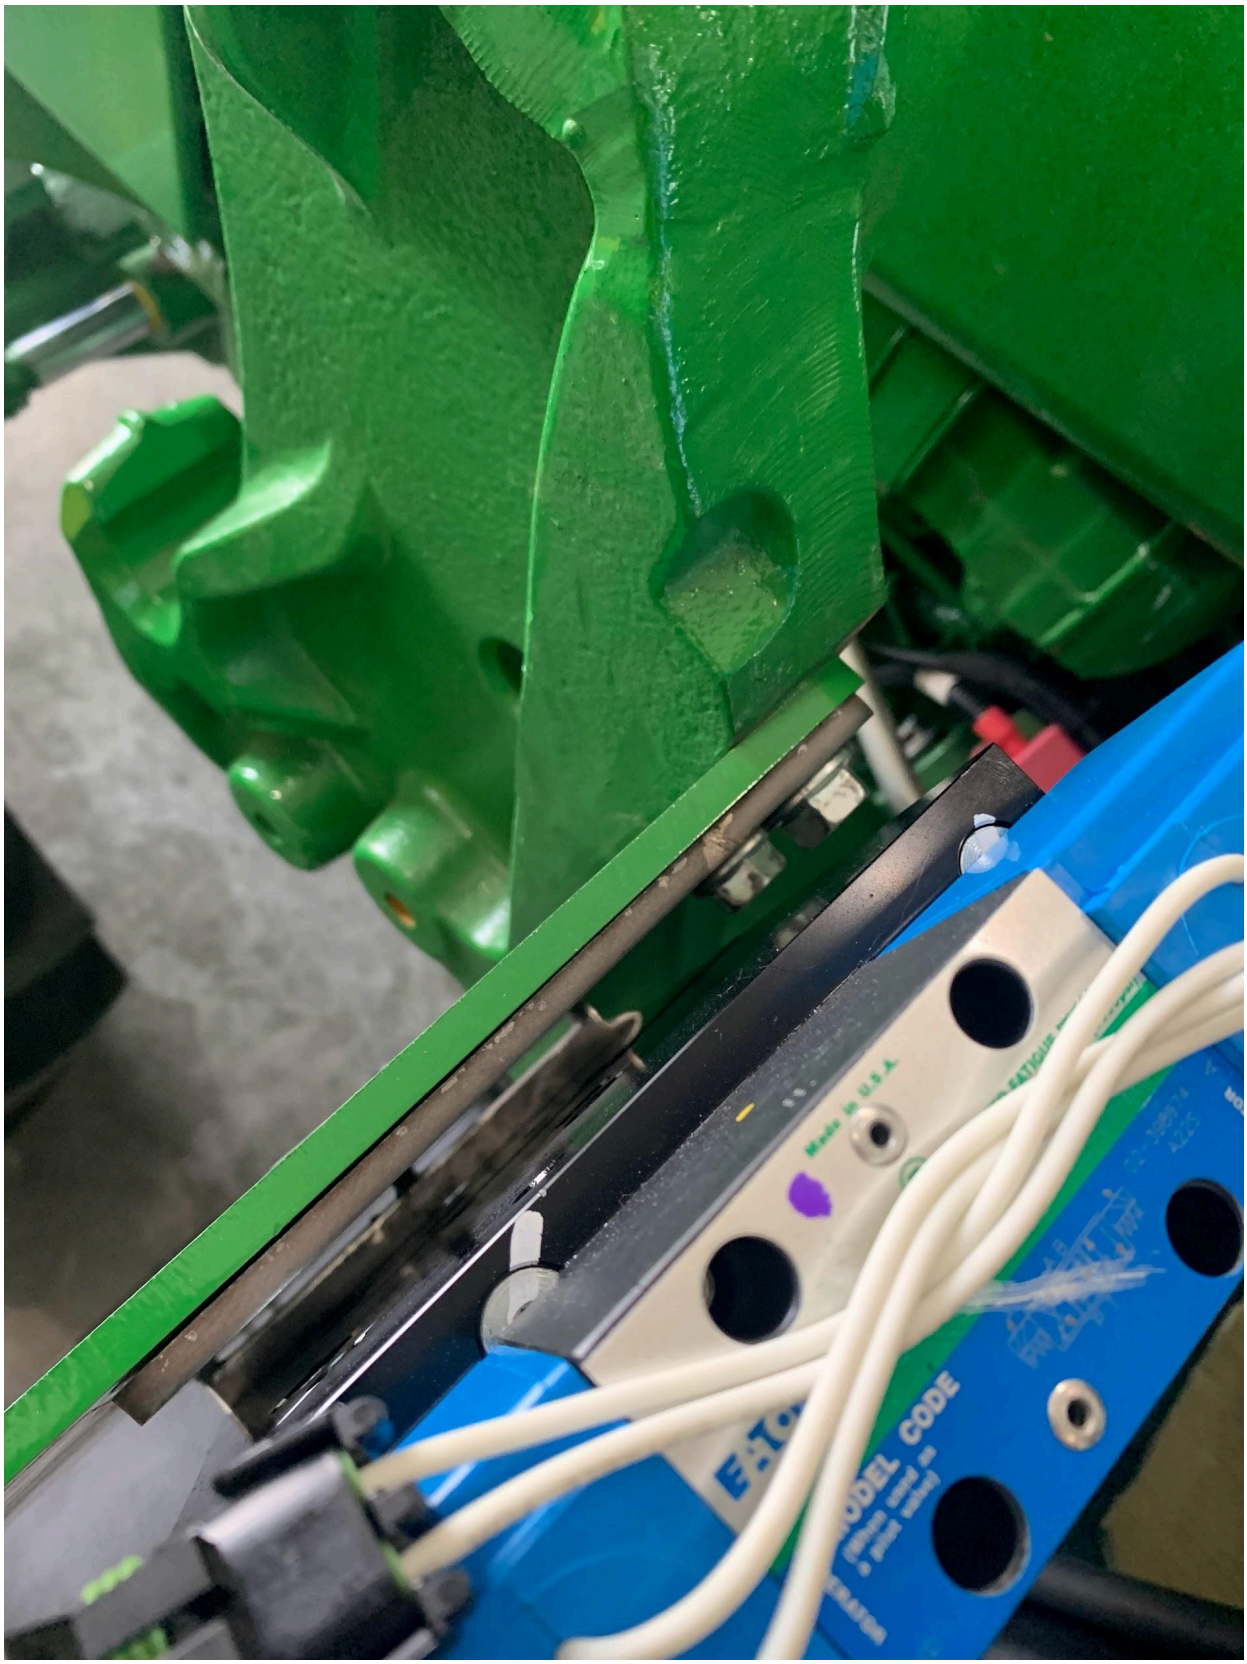
Made in U.S.A.
MODEL CODE







JOHN DEERE
TEMPERED




Outdoor Dual Port PoE Extender
Model: PT-PSE200B-OT
2* Input: 44-57Vdc 8/4A
2* Output: 50V ⎓ 8/4A (Max)
2* Power Pins Support 802.3at/af
Data Speed: 10/100Mbps
Protection Rate: 1.2.3.4.5.6.7.8
Common mode/Differential mode
SN:
MADE IN CHINA


PROCET
Outdoor Dual Port PoE Extender
Model: PT-PEX-820B-CT
Input : 44-57Vdc 95W (Max)
Output: 56V 1.625A (Max)per port , total 90W
Power Pins Output:
Jack(+), 1/2(-) and 4/5(+), 7/8(-)
Data Speed: 10/100/1000Mbps
Protection time: 1,2,3,4,5,6,7,8
Common mode(1U/700us): 6KV
SN:
PT-CA0220010
MADE IN CHINA



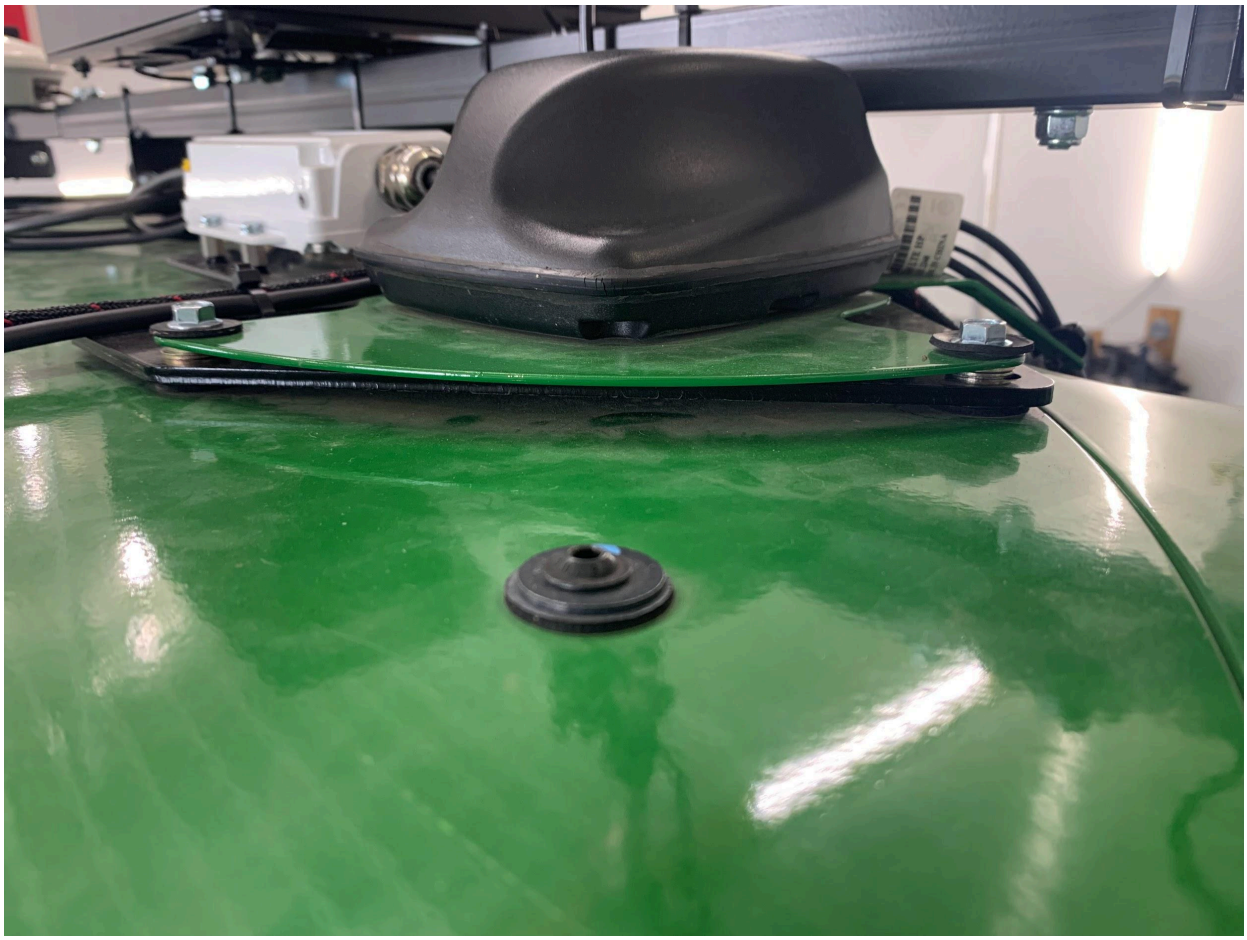










8.8
8.8
8.8

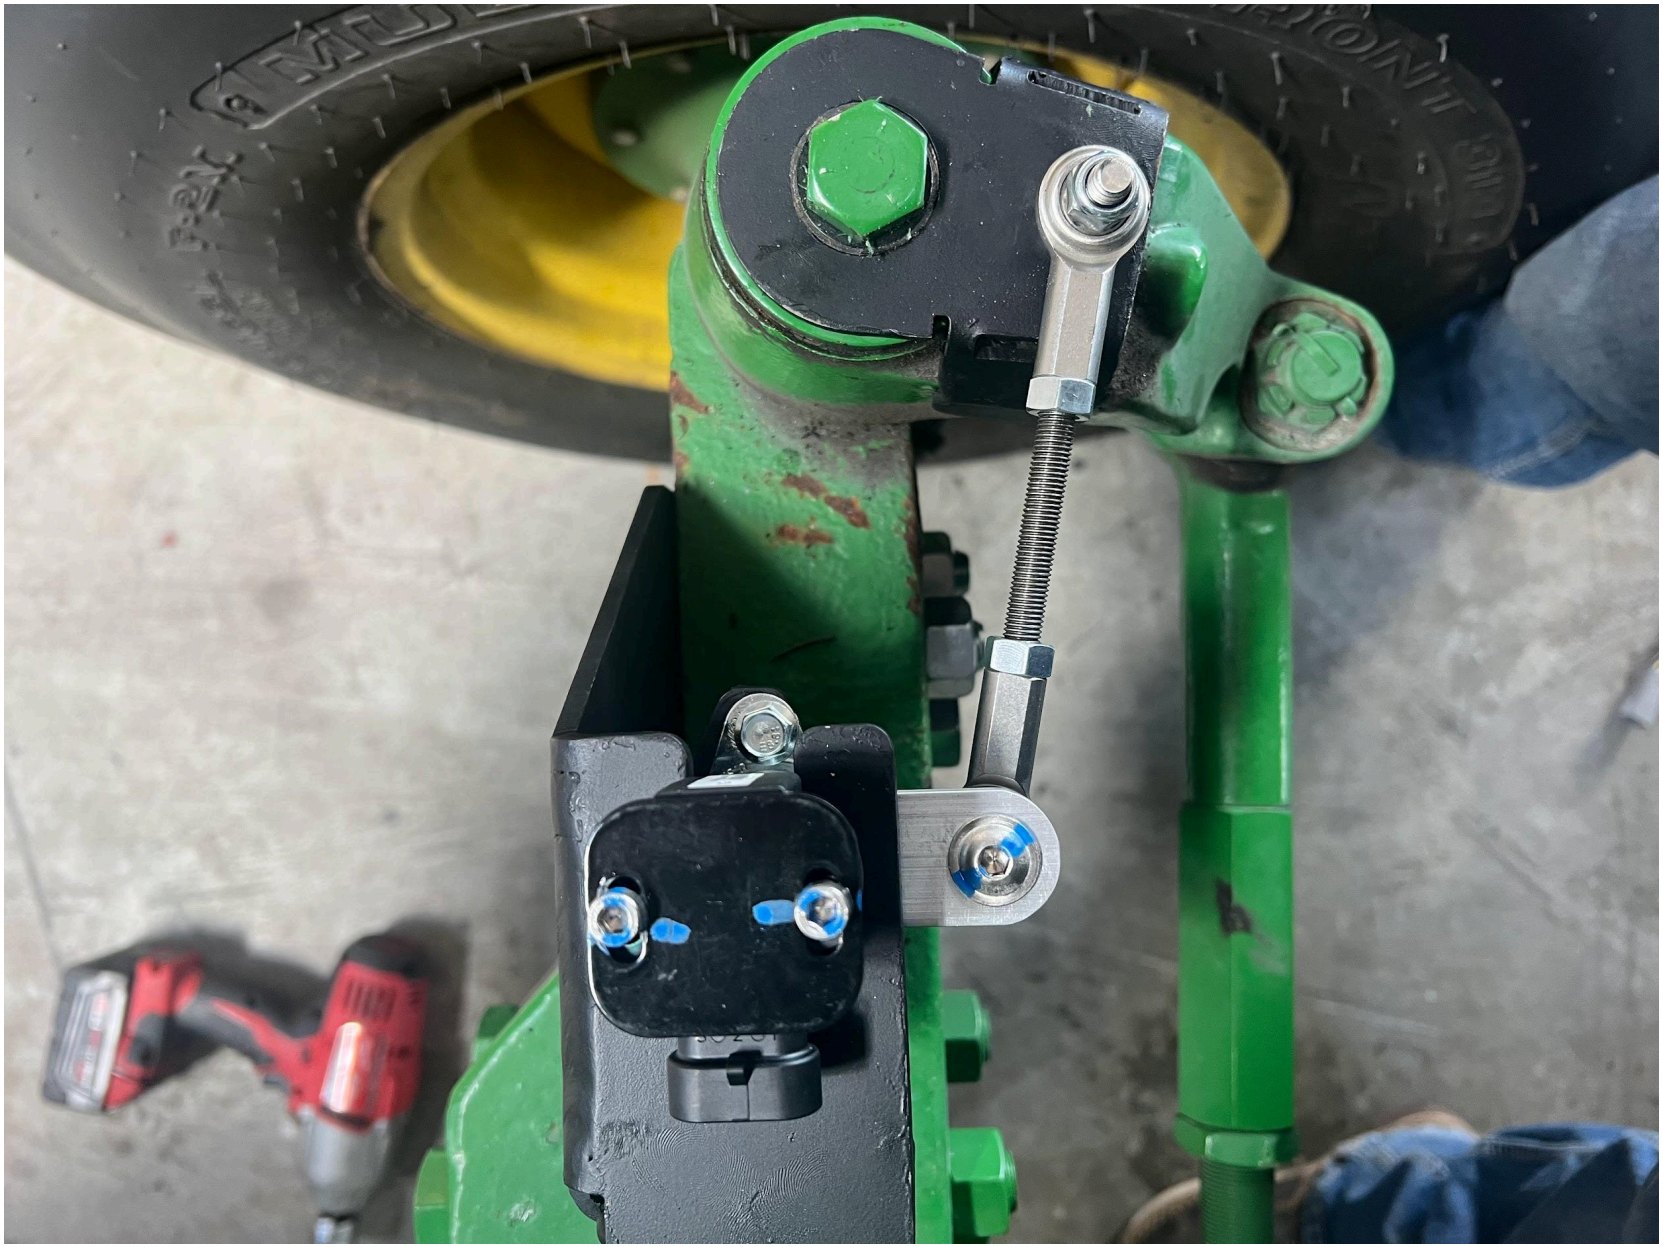

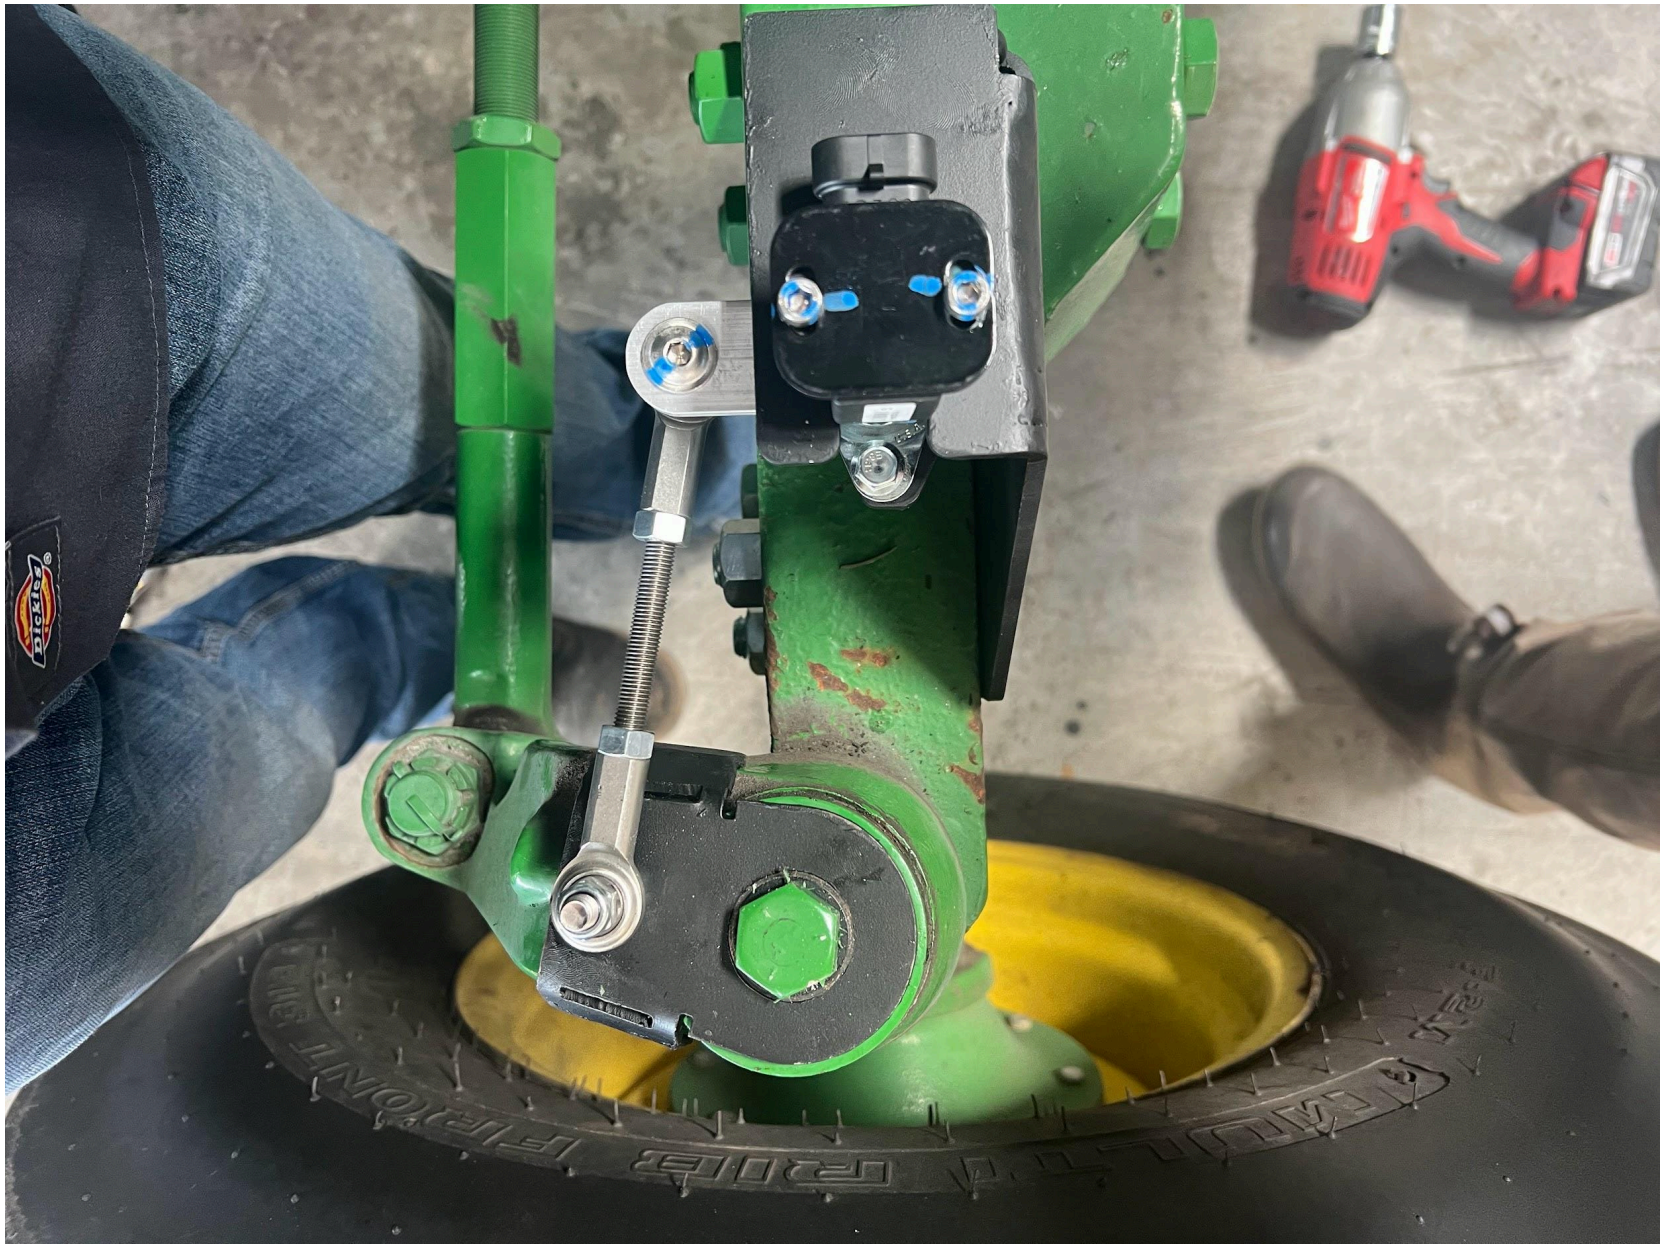






TRACTOR 6125E
FIELDS
C 33516




FIELDS
EQUIPMENT CO., INC.
C 33516
25ft
16ths
10ths-100ths
Engineers
DURA NY-COAT
KOMELON
NYLON COAT






1
25ft
2
16ths
3
DURA NY-Coat™
4
KOMELON
5
.1
.2
10ths-100ths
.3
Engineers
.4





MEXICO
220901 164143 6


MEXICO




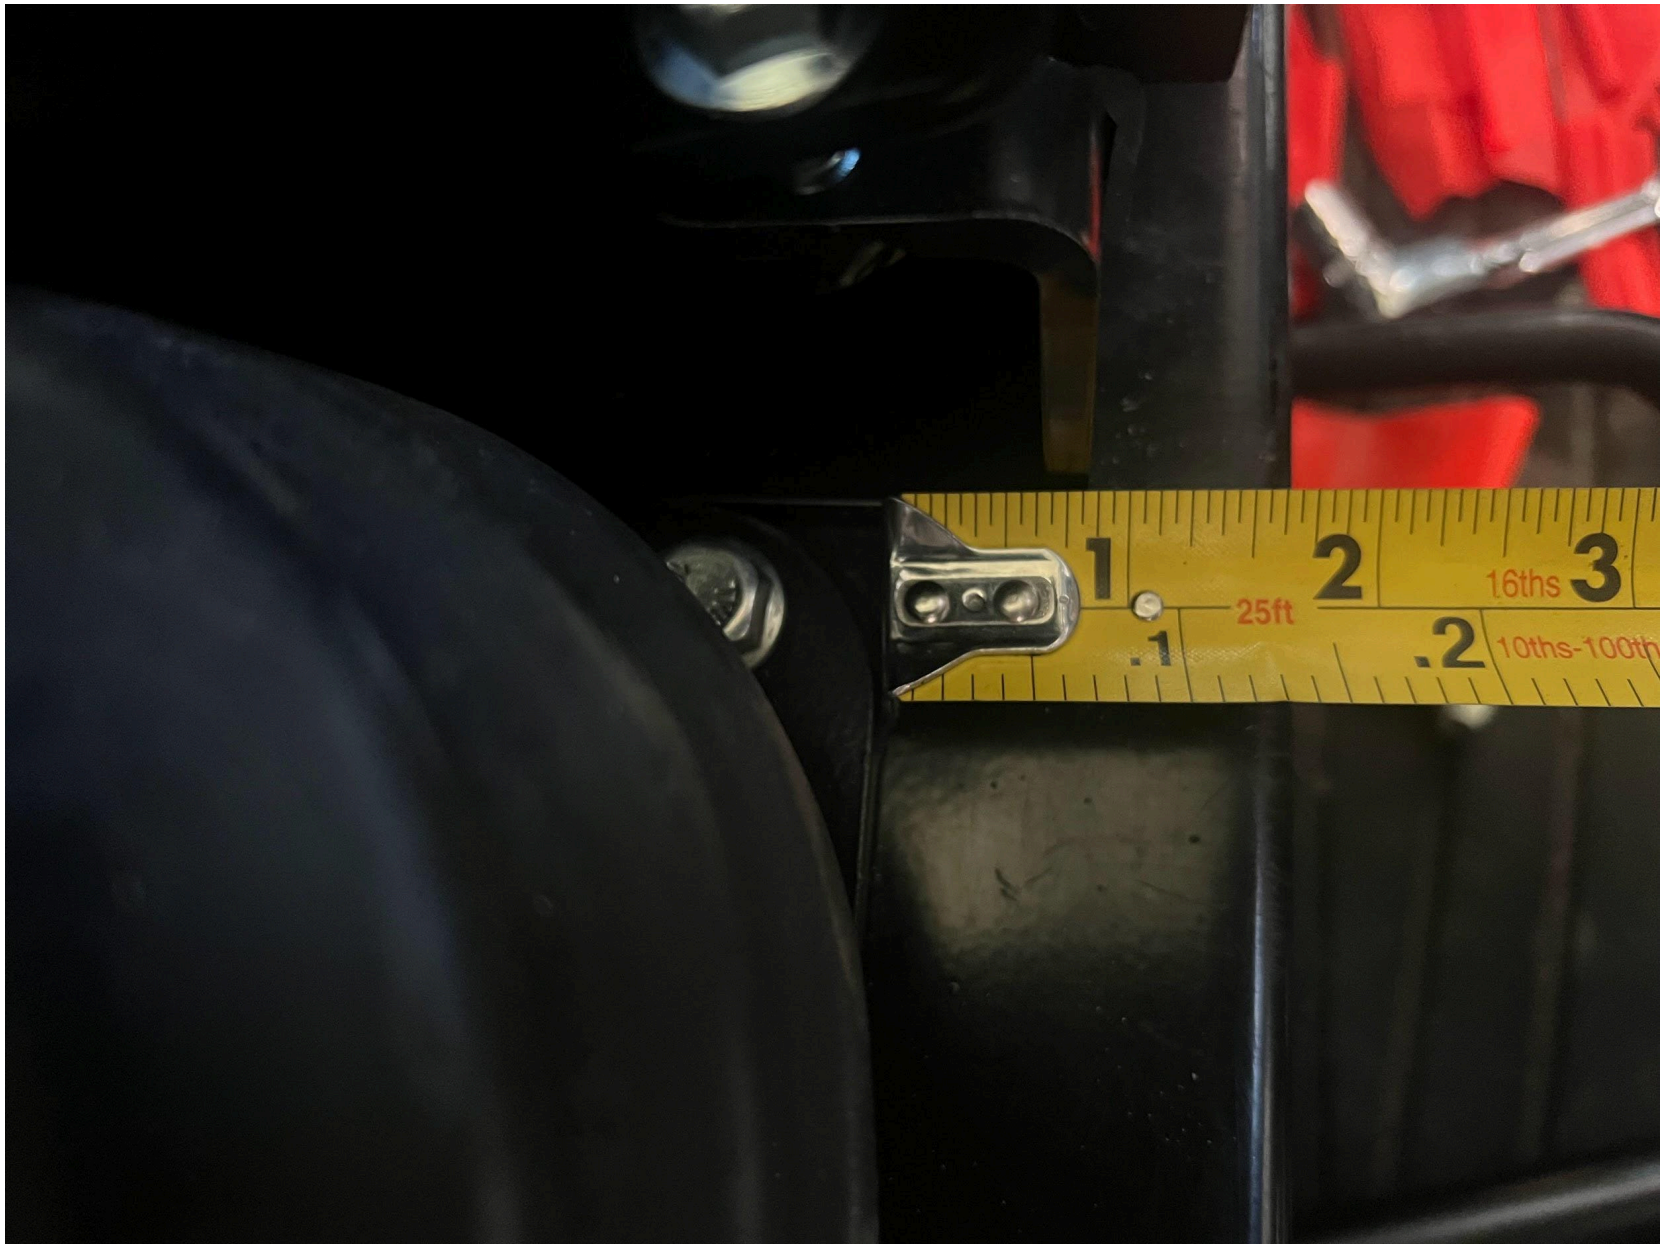


1
2
16ths
3
25ft
.1
.2
10ths-100th





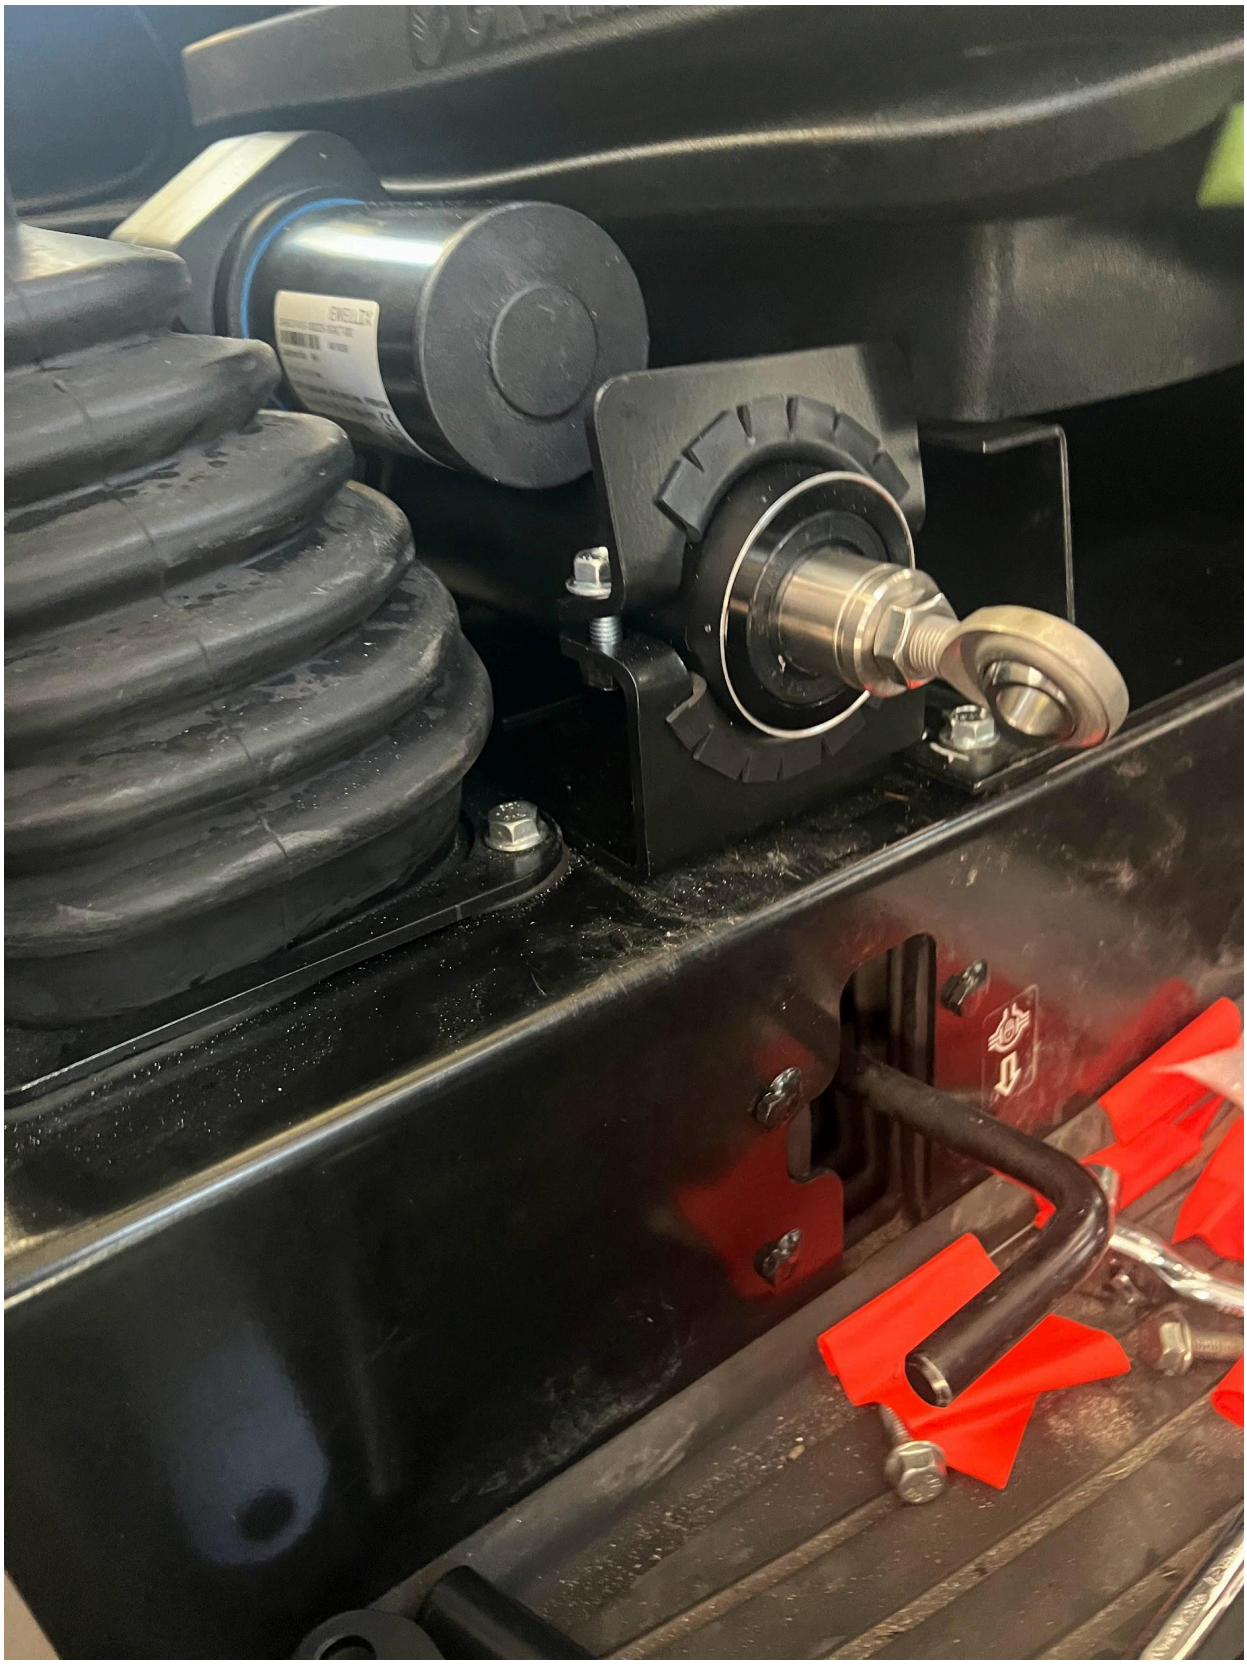





1
2
3
4
25ft
16ths
10ths-100ths
.1
.2
.3
DURA NY-Coat
6190






24

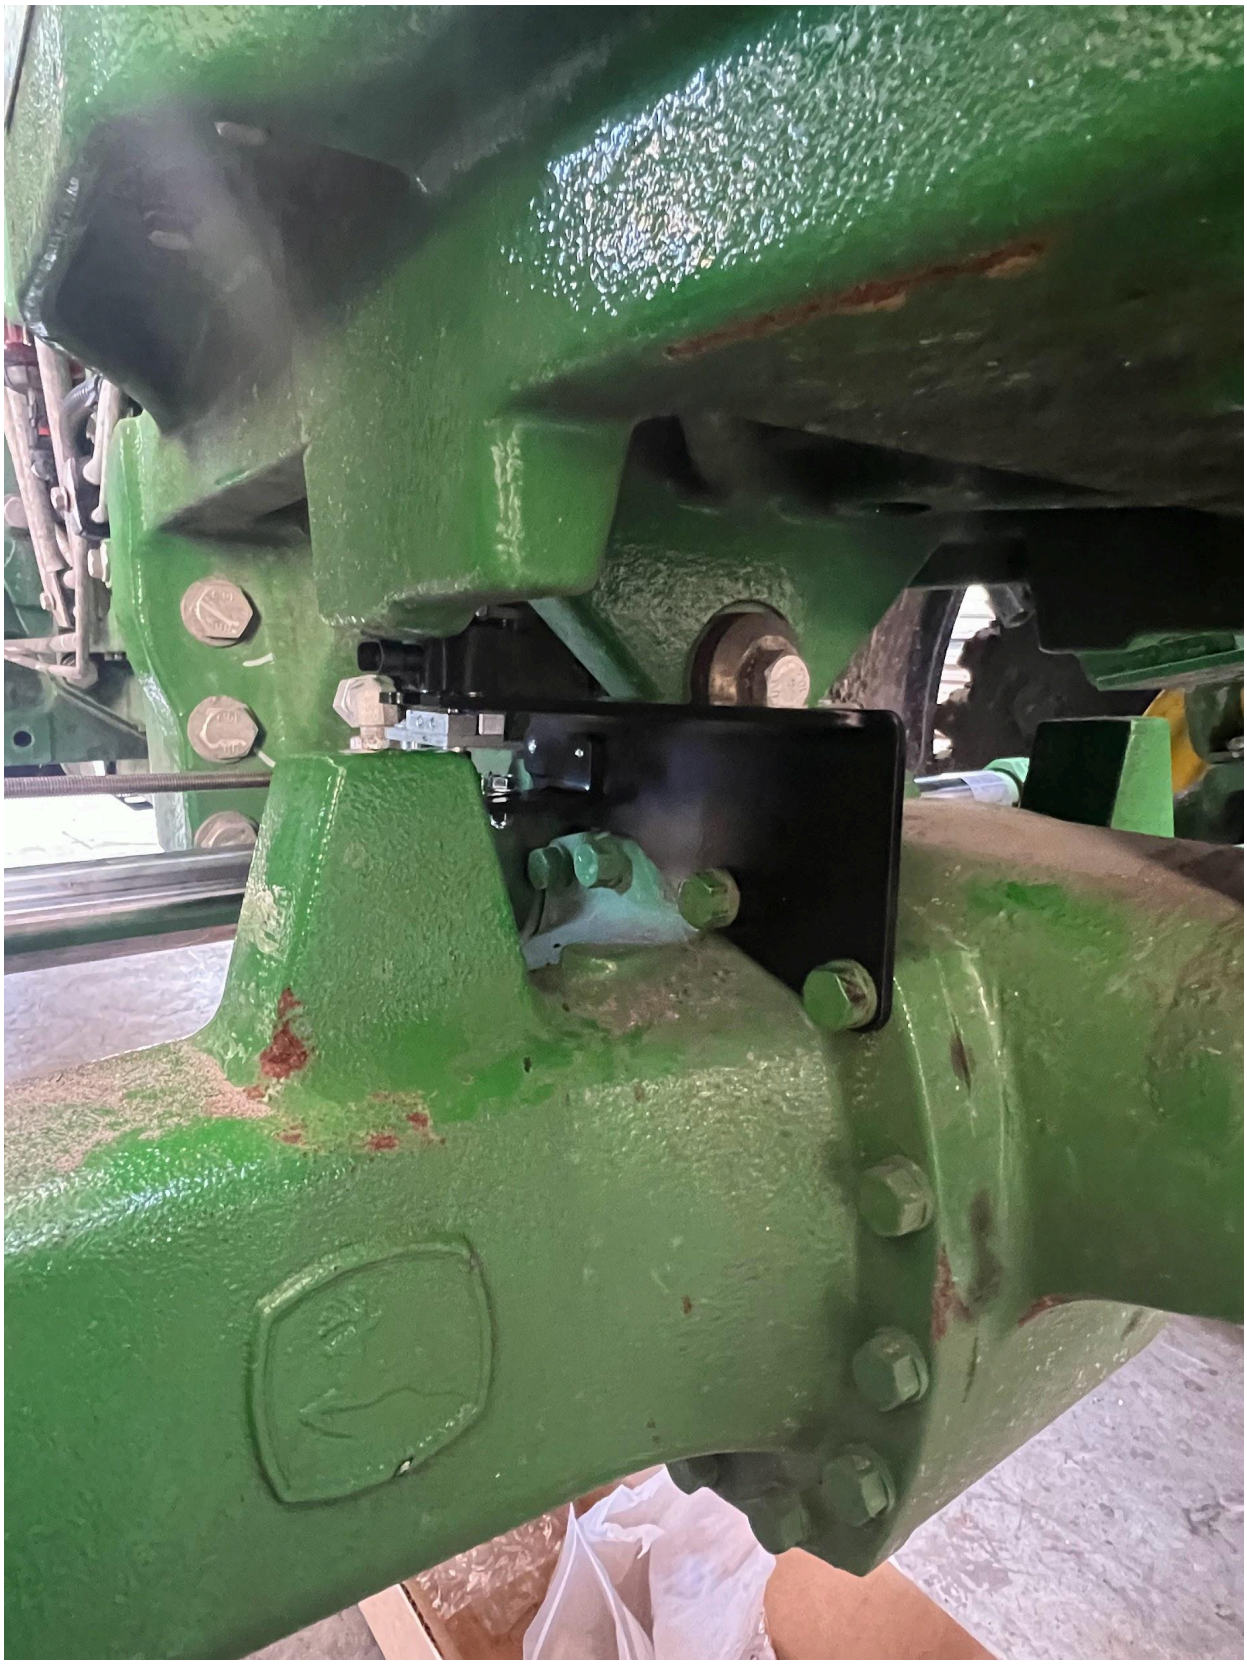






JOHN DEERE





